

# VOTEX<sup>®</sup> ROADMASTER 07

## PROFESSIONAL HIGH-CAPACITY FLAIL MOWER




Votex introduces the Roadmaster 07, the successor to the widely-known Roadmaster 06 series. The 07 series is equipped with a completely new cutting head, provided with two fully integrated guide rails. This construction makes it possible to equip the machine quite easily with the preferred three-point linkage. To this end the Roadmaster 07 series offers a choice of three different three-point linkage versions: one-sided, double-sided and a unique patented front-trailed linkage. This front-trailed linkage ensures unparalleled adaptation to the ground, which enables higher driving speeds and, in addition, makes for a longer life of the machine. The machines are provided with a heavy-duty driving line. The gearbox with spiral teeth and the double power-belt drive ensure in conjunction with the accurately dynamically balanced rotor shaft quiet, practically vibration-free running of the machine. The Roadmaster 07 is available in working widths of 150, 190, 230 and 260 cm.

- Solid professional machine
- Compact design
- Choice of three 3-point linkages
- Rotor shaft with the renowned Votex 40x12 flails
- Simple cutting-height adjustment
- 60 cm hydraulic side shift (for double 3-point linkage)
- Heavy-duty driving line
- 2307 provided with especially heavy rotor shaft (Ø159mm)



Rail construction with side shift




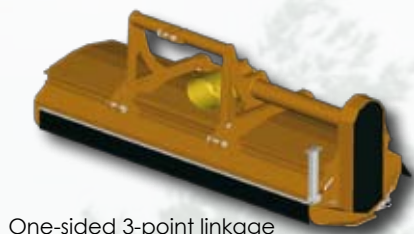

One-sided 3-point linkage



Double-sided 3-point linkage

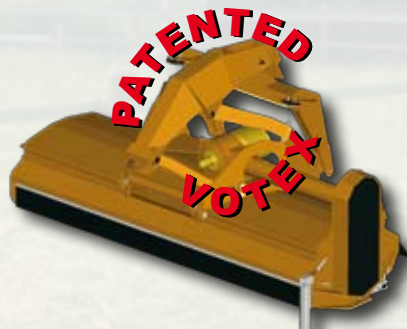

Patented front-trailed 3-point linkage



### Options:

- Rotor shaft with hammer flails (type 130)
- Adjustable cutting plate (removable)
- Chain guard on front
- Double-sided 3-point linkage with 60 cm side shift
- Front-trailed 3-point linkage with 42 cm side shift

### Technical data:

Votex Roadmas- ter 07	1507			1907			2307			2607		
Linkage type												
Cutting width (cm)	150	150	150	190	190	190	230	230	230	260	260	260
Transport width (cm)	183	183	183	219	219	219	255	255	255	292	292	292
Weight (kg)	677	728	887	723	774	933	769	820	979	924	975	1134
Mounting category	II	II+III	II	II	II+III	II	II	II+III	II	II	II+III	II
Min.power required (kW)	30	30	30	40	40	40	50	50	50	60	60	60
PTO shaft (rpm)	540/1000	540/1000	540/1000	540/1000	540/1000	540/1000	540/1000	540/1000	540/1000	1000	1000	1000
Cutting height (cm)	2.5 - 7.5	2.5 - 7.5	2.5 - 7.5	2.5 - 7.5	2.5 - 7.5	2.5 - 7.5	2.5 - 7.5	2.5 - 7.5	2.5 - 7.5	2.5 - 7.5	2.5 - 7.5	2.5 - 7.5
Side shift (cm)	-	60	42	-	60	42	-	60	42	-	60	42
Max. offset from tractor center (cm)	104	108	104	140	144	140	154*- 174**	160*- 180**	155*	158	162	157.5
Rotor (rpm)	2000	2000	2000	2000	2000	2000	2000	2000	2000	1710	1710	1710
Ø Rotor (mm)	140	140	140	140	140	140	159	159	159	194	194	194
Ø Roller (mm)	159	159	159	159	159	159	159	159	159	159	159	159
Number of flails	48	48	48	60	60	60	72	72	72	84	84	84

\* Extended drive (required when working at centre of tractor)

\*\* Short drive (does not work at centre of tractor; provides more offset)



Herculesweg 6 NL-4338 PL  
Middelburg The Netherlands

+31(0)118 - 679500

+31(0)118 - 638730

sales@votex.nl

www.votex.nl



Your Dealer: